


www.aksharhlsolution.in

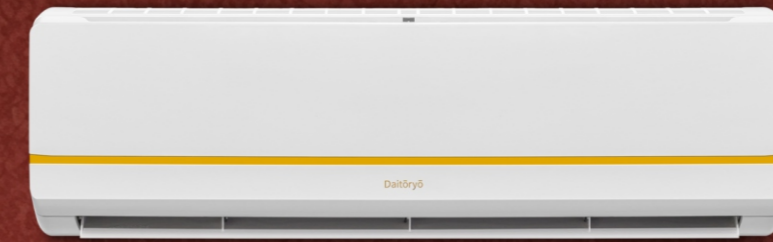

COMFORT BEYOND YOUR EXPECTATIONS
WALL MOUNTED AIR CONDITIONER

COOLS
EVENT AT
46°C

**R-32
ECO**
REFRIGERANT

**SILENT
AIR**

**100%
COPPER**

UP TO
**20FT
LONG**
AIR THROW

**5
YEARS
WARRANTY**

Daitōryō

BRING NEW TO HOME

MARKETED BY

AKSHAR HOME & LIFE SOLUTIONS

44-45-46, Ground Floor, Tirupati Complex, Nr. Shreeji Parlor, Ambica Highway, Kalol (N.G.), 382721, Gujarat - India. aksharhandlsolution@gmail.com

MANUFACTURING BY

SHREEJI PLAST (UNIT-2)


Survey No. 564, Jhulashan - Vadu Road, Opp. Sadhi Mata Temple, Vadu, Kadi, Dist. : Mehsana - 384440, Gujarat - India.

www.aksharhlsolution.in

2025 RANGE OF AIR-
CONDITIONERS

Daitōryō

BRING NEW TO HOME

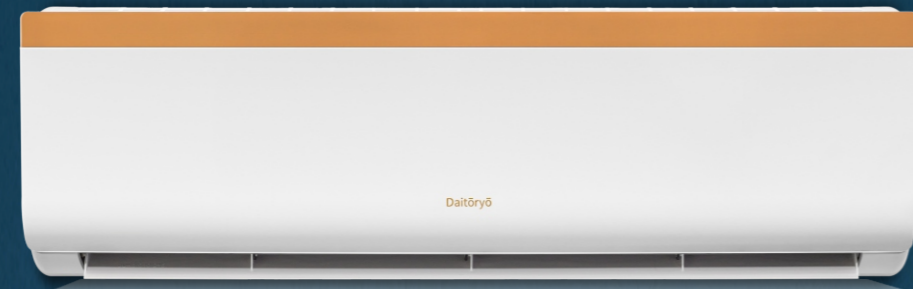

FRESH AIR ALONG WITH
20^{FT.} LONG
AIR THROW



Daitoryo

Expanded chasis of indoor unit increase air flow & heat transfer rate to offer you better comfort and cooling in wider range.

- gives higher cooling capacity
- remove humidity on higher rate and keep you refreshing
- longer Heat exchanger helps to boost heat transfer from room
- offers a wide air flow


RANGE OF PRODUCTS

ABOUT THE PRODUCTS

Available in multiple design front panels of Decorative colours to let you select your choice fit with your Decor.
Wide range of product availability and art of state manufacturing facility to fulfill customer everchanging demand in affordable cost.




CAPACITY - 1 / 1.5 / 2 TON

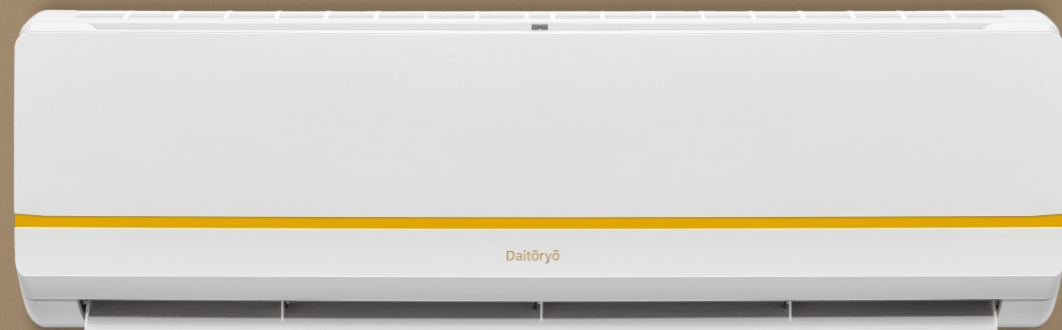


CAPACITY - 1 / 1.5 / 2 TON



CAPACITY - 1 / 1.5 / 2 TON

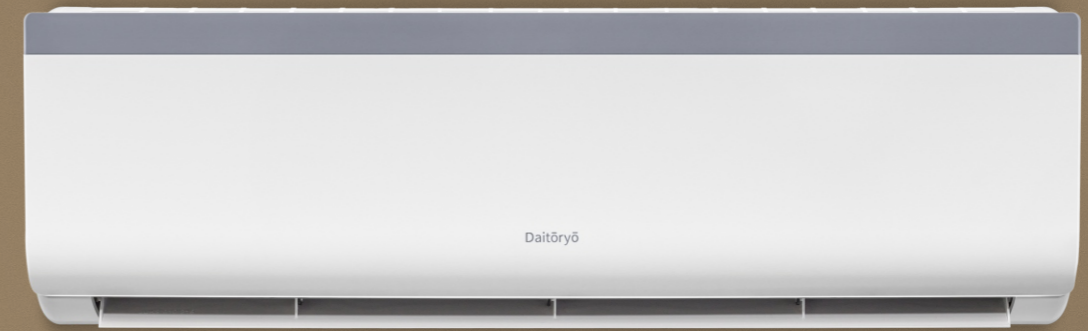

CAPACITY - 1 / 1.5 / 2 TON

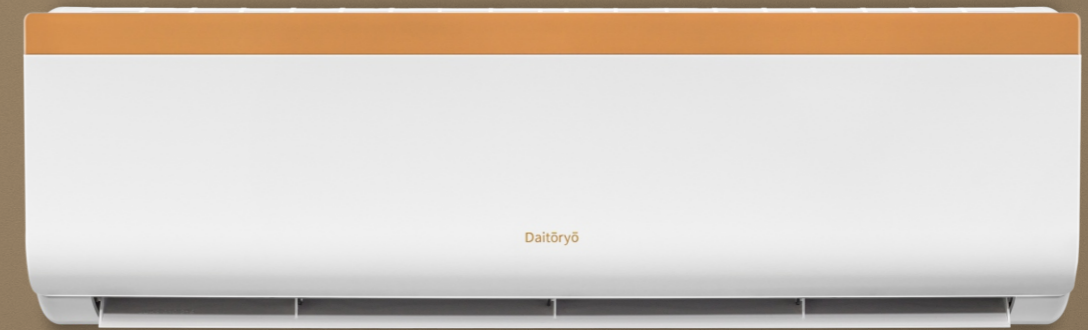

CAPACITY - 1 / 1.5 / 2 TON

WARRANTY

1 1 YEAR ON
CONTROLLER / PCB


5 5 YEAR ON
COMPRESSOR



SIDE VIEW OF PRODUCTS



Glossy & Textured Finish

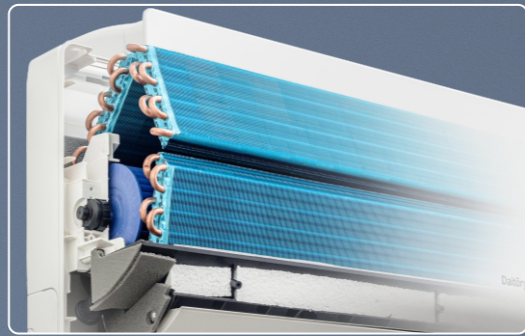

Balanced Cycle of HE & Cross Flow Fan



CAPACITY - 1 / 1.5 / 2 TON



CAPACITY - 1 / 1.5 / 2 TON




CAPACITY - 1 / 1.5 / 2 TON



CAPACITY - 1 / 1.5 / 2 TON



CAPACITY - 1 / 1.5 / 2 TON

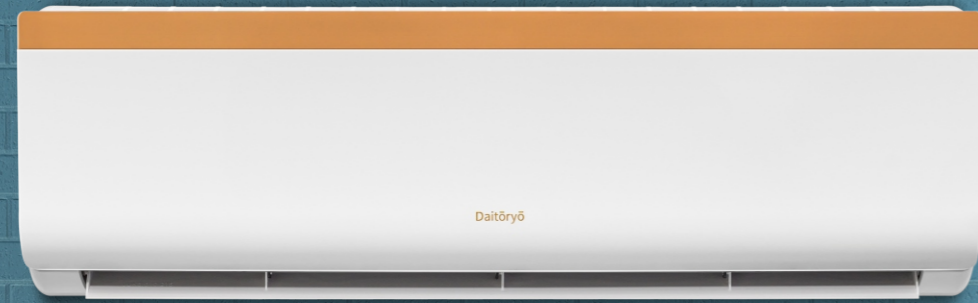

HIGHLY UV PROTECTED GIVES BENEFIT FOR
- PREVENTING YELLOWNESS





HIGH MECHANICAL STRENGTH OF RAW MATERIAL IMPROVE
- LIFE OF PLASTIC PARTS
- GIVES FLEXIBILITY IN HANDLING



HIGH GLOSSINESS FACILITATE
- EASY CLEANING
- SUPERIOR AMBIENCE TO DECOR




UL CERTIFIED PLASTIC RAW MATERIAL ENSURE
- HIGHLY PROTECTION AGAINST FLAMMABILITY HENCE
FULFILL ALL THE COMPLIANCE AT HOME

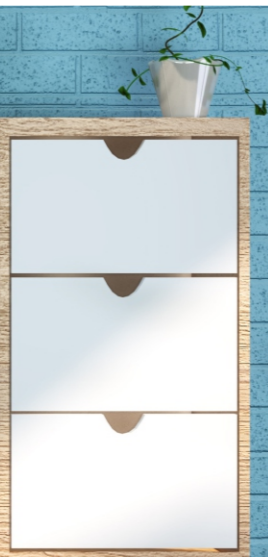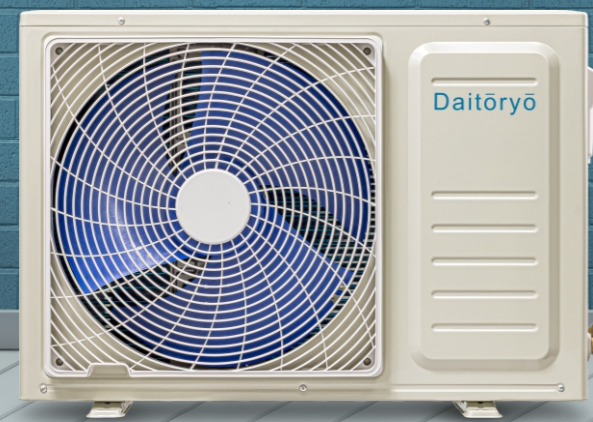

REMOTE

- ♦ Iconic wave design
- ♦ Night glow buttons for more visibility
- ♦ Coloured buttons for easy access
- ♦ Can work up to 6m range

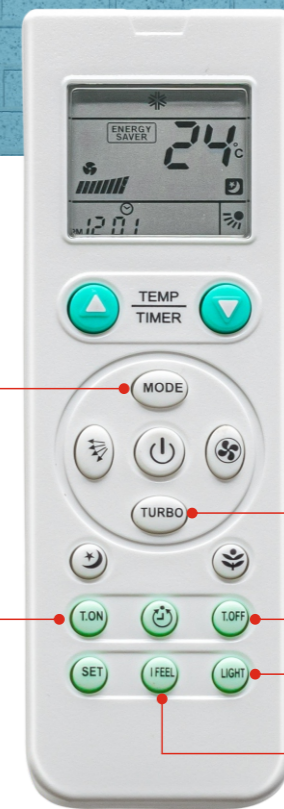

ICONIC WAVE

Artistic curve on the remote accentuates aesthetic for delightful AC Control.

Timer On

MODE

TURBO Start Compressor Instant

TON

TOFF


When you press light button than light will be Off

SET

I FEEL

I feel Shows Room Temperature

T-FLOW FAN

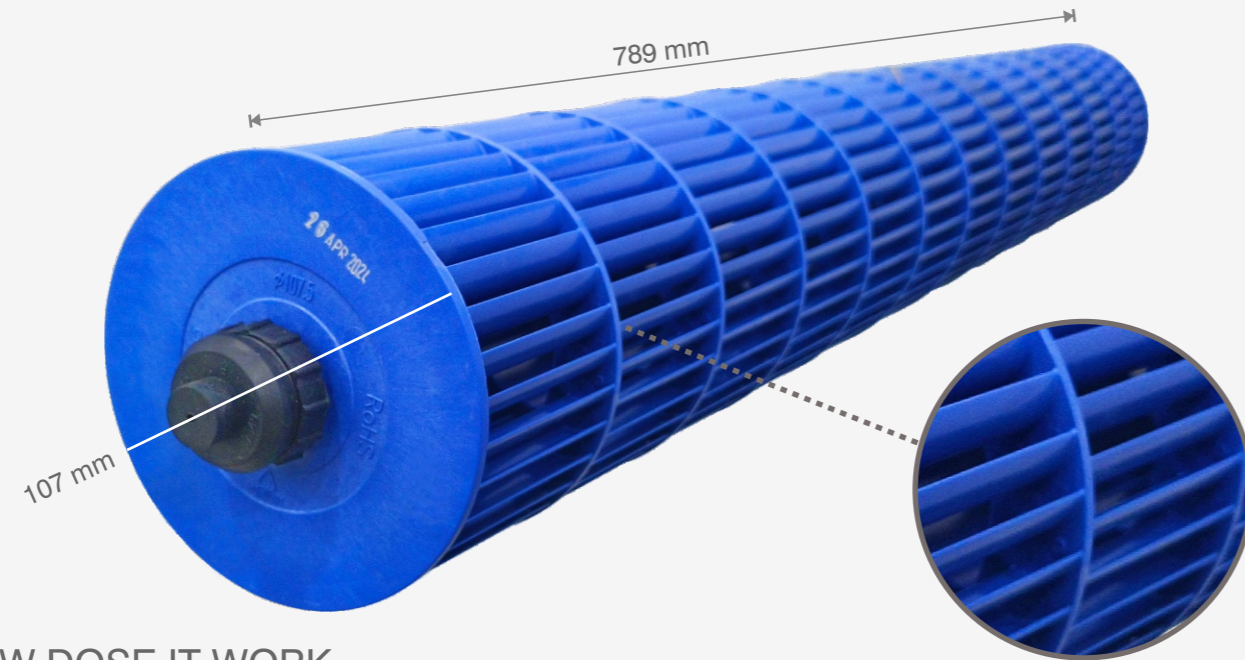


HOW DOES IT WORK

Having maximum length to cover wide Air Flow and specially design to provide silent air

Specially design to provide silent Air

EVAPORATOR COIL

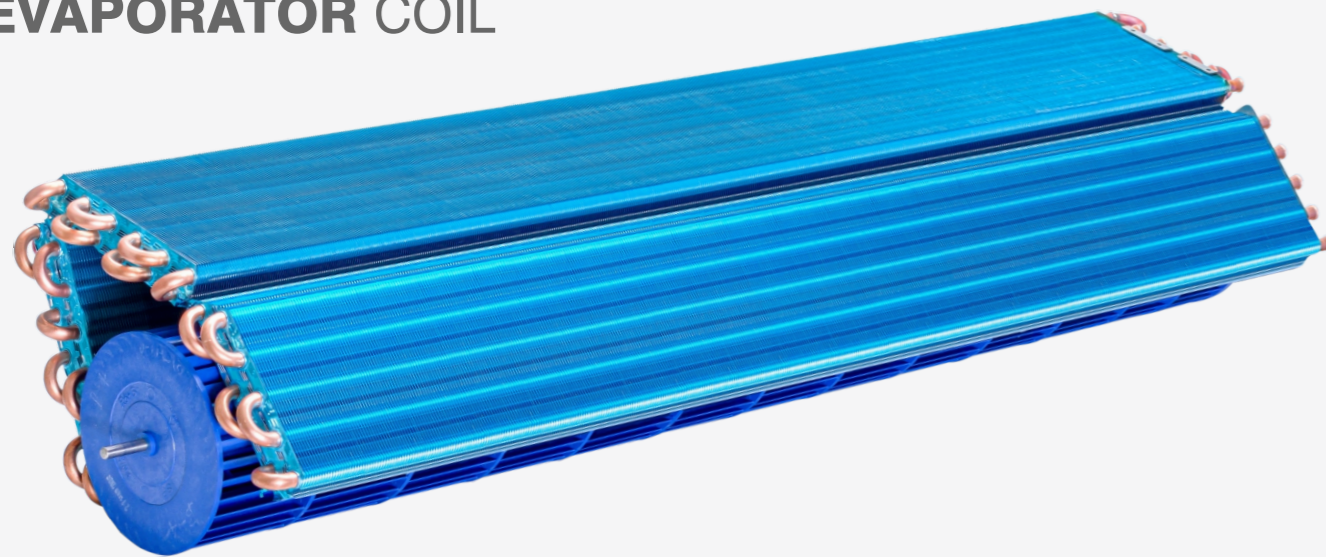



100% COPPER | **WITH BLUE FIN COIL**

5 PASS EVAPORATOR COIL


- ◆ Copper Thickness - 0.23 mm
- ◆ Fin Per Inch (FPI) - 18 FPI
- ◆ Coil Length 5&6 Hole - 780 mm
- ◆ 7 Hole - 750 mm
- ◆ Pitch - 21 mm

PP FILTER MESH

Open space area more than 70% as well as designed according to BIS Standard

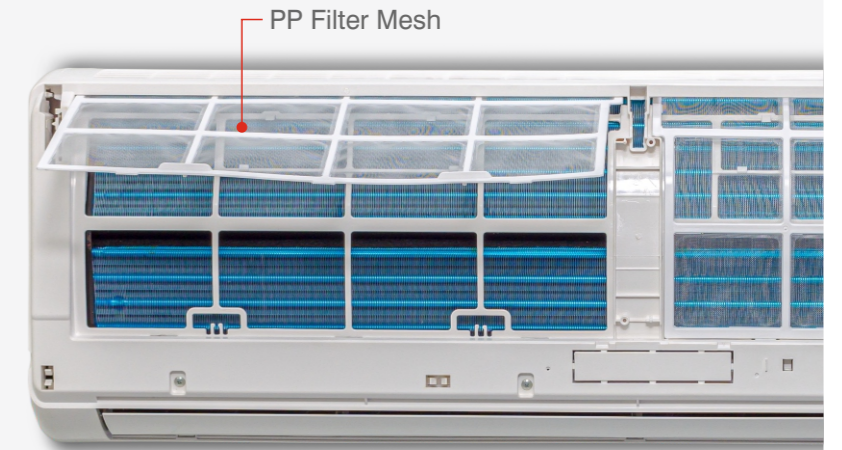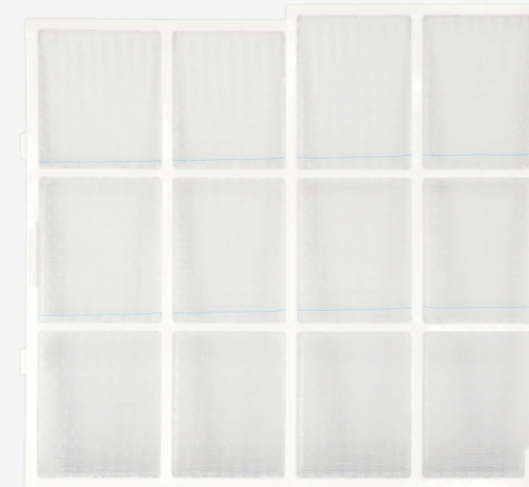

NEW ADDITION

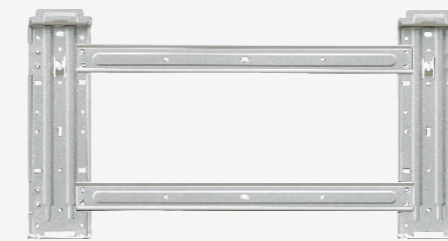


High Wall Mounting Unit

Defrost Technology


I Feel

TECHNICAL SPECIFICATIONS

20 FEET LONG AIR THROW

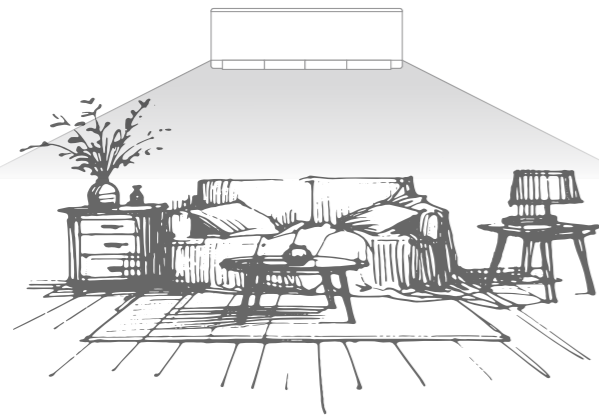


SYSTEM FEATURES

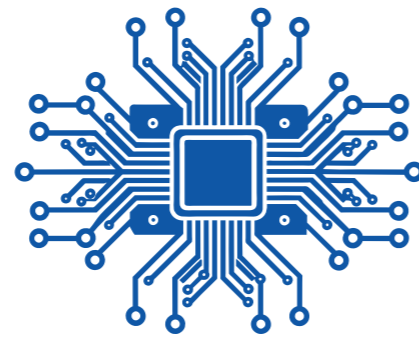


Controller Start with Default memory in the Non-volatile Memory Fail

BIGGER INDOOR UNIT

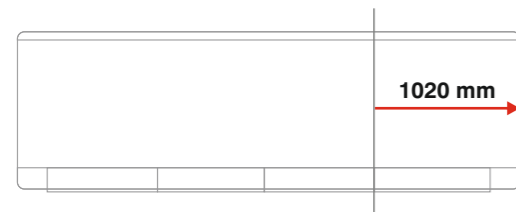

Bigger Unit and Suction area. Better Draft for a Better Air Experience.


3 FAN SPEED

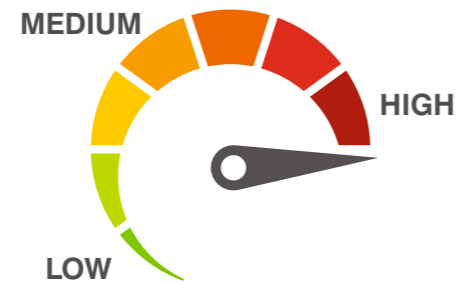


The motor in IDU enables 3 variable fan blower speed, with seamless transition between silent to high speeds, providing reduced noise levels & more speed options

100% COOLING CAPACITY EVEN AT 46°C

Daitoryo AC's deliver 100% Capacity **46°C** Standard Condition **35°C**

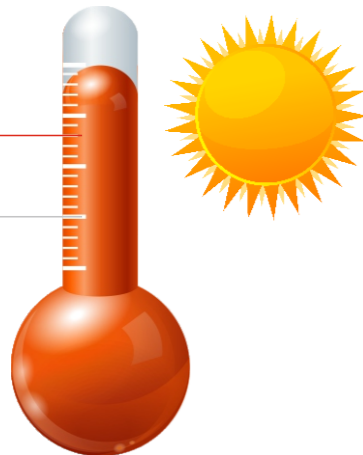

SUPER LOUVERS FINS

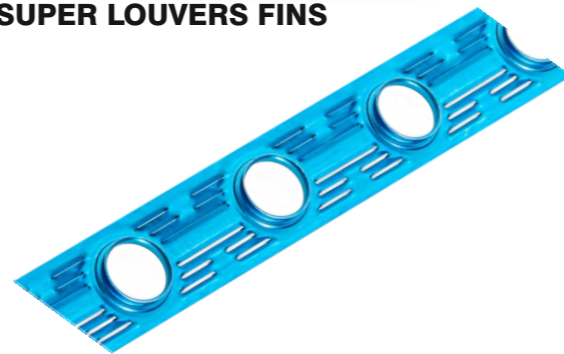


Super louvers fins of Daitoryo AC have multiple slits that provide more heat exchange area & cools the room faster.

I FEEL



I feel shows room temperature

DEFROST

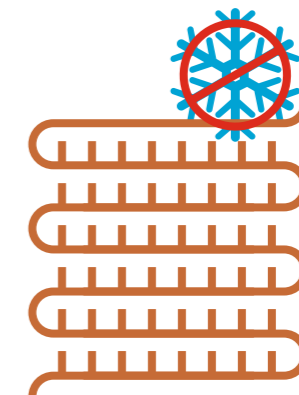

Include a process called defrosting i.e. the process of removing ice build-up from the coil


SILENT AIR



Ensure air-cutting noise reduction with New Design Technology.

TROPICAL DESIGN

AC's are designed to keep you cool and work efficiently up to **46°C**

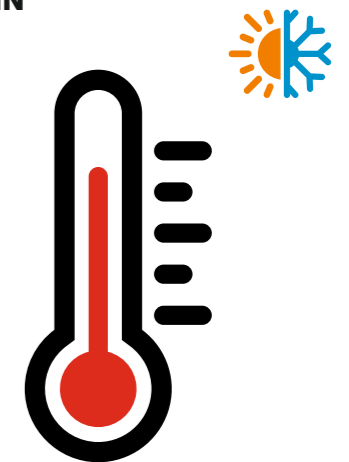

100% INNER GROOVED COPPER TUBES



100% Inner Grooved Copper Ensures faster cooling with its Turbulent Refrigerant Flow that enhances heat transfer rate

GREEN REFRIGERANT



Eco-friendly units equipped with R32 pre-charged refrigerant

OUTDOOR UNIT



Daitoryo


HANDLE



R32


S.N.	PARAMETERS	UOM	SPECIFICATION
1	Tonnage	TR	1.5
2	Rated voltage	V	230V, 50Hz, 1Ph
3	Power Supply	V	230
4	Std. Cooling at 100% capacity	W	4900
5	Power Input at 100% capacity	W	1380
6	Rated Current	A	5.7
7	ISEER	-	3.55
8	IDU Dimensions L x W x H	mm	1020 X 320 X 220
9	ODU Dimensions HXWXD	mm	780 X 240 X 530
10	Indoor Noise level	dB(A)	52.66
11	Ambient operating Temp. Range	C	35 - 46
12	Refrigerant Type	Non / CFC	R32
13	Evaporator & Condenser Coil Material	-	Copper & Aluminum
14	Rating	-	★★★★★

BLUE FIN HEAT EXCHANGER

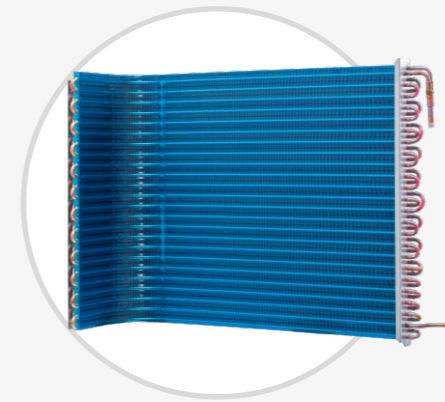

- Contributes to top seasonal efficiency.

NEW ASYMMETRIC FAN DESIGN

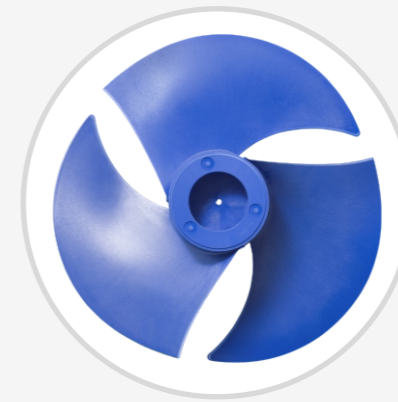

- Increases Air Flow
- Low Sound Levels

MOTOR



- More Powerful Motor with Long Life
- Outstanding Energy Saving
- Reduced Noise Level
- Reduced Connected Load
- Stainless Steel Shaft



Daitoryo